

Optimus Meal Delivery Cart



Dimensions

Outside Dims:


Height 56.11" Width 47.625" Depth 31.5"

Inside Dims:

Height 43" Width 26" Depth 26.625"

Tray Dims:

Length 23.5" Width 12.5" Height .5"

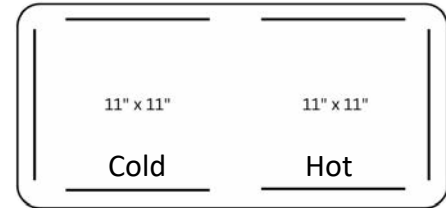

Construction/Material

- All exterior surfaces 18-Gauge Stainless steel
- Base frame 16-Gauge Stainless steel with reinforced cross channel
- Fully insulated top, bottom, sides and doors.

Heating/Refrigeration/Electrical

- Side-mounted refrigeration
- Heating strips throughout heated side
- 120 Volts/1400 Watts/14 Amps
- NEMAplug 5-15
- 12 gauge cord hanger on side
- Touchscreen temperature control

Warranty/Maintenance:

- 1 year parts and labor warranty
- Available Uptime Maintenance Kit (optional)
- 2 year and 3 year warranty available

Capacity

- Cart can hold 20, 22, or 24 meals
- Shelf spacing 4", 3.75", or 3.5"

Components

Doors

- Automatic soft closure, hold open clutch
- Heavy duty stainless steel hinges
- Antimicrobial handles

Display

- Touchscreen with data drive

Shelving

- Removable Uni-Shelf designed to fit with the JonesZylon Uni-Tray
- Removable racking on hot and cold side

Handles

- Two vertical quick grab handles
- Perimeter bar around top of cart
- Hot-Side ergo handle (optional)

Bumper

- Bottom mounted perimeter bumper

Casters

- Six 6" premium casters mounted to 1/4" plates.
- 4 Outer swivel casters, 2 center rigid casters