

# Drying Rack (JZDRA-92)




## CONSTRUCTION/MATERIAL:

- Sturdy construction specifically designed for the demanding corrections environment
- All welded construction
- All fasteners are tamper-proof
- Type 6063-T5 aluminum alloy with wall thickness of 0.070"

## WARRANTY/MAINTENANCE:

- Aluminum: 5-year warranty against manufacturing defect

## COMPATIBLE INSERTS: JZDRI-3

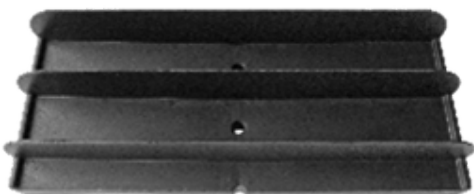

## DIMENSIONS/CAPACITY:

Height 72.63" Width 80.50" Depth 22.88"

## CAPACITY:

Insulated Tray		Segregation Tray	
PRTS-5000 15 x 11 x 2	184	Large	184
PRTS-4000 15 x 13 x 2.5	184*	Med & Small	276
PRTS-6000 15 x 14 x 2.875	184*	Self-Stacking Tray	
		SmartTray	184

\* with 2" overhang

## COMPONENTS:

### Shelving

- Four shelves
- Eight inserts per shelf, 32 inserts per rack
- Interchangeable inserts – mix and match

### Casters

- Four 6" poly swivel casters with brakes

## INSERTS:

- Inserts made of copolymer material
- Dishwasher safe, temps up to 212° F
- Shatterproof and resists sharpening

### JZDRI-3

- 1.813" wide slots
- 23 slots per shelf, 92 per rack
- Run inserts through dishwasher for better sanitation and restore to 'like new'
- Plastic inserts prolong life of plastic trays instead of scraping over all metal drying racks